

STELLAR W

CODE: 5.2103.02M1.C670.GF

LED | 3000 K | >90 | SDCM ≤3 | 50,000 h L80 B10 | IP20 | Casambi | 220-240V 50-60Hz |  | 



TECHNICAL DATA

Power: **19 W CC HO (High output)**
Flux: **618 lm**
CCT: **3000 K**
CRI: **>90**
SDCM: **≤3**
Durability of LED sources: **50.000 h, L80 B10**
Diffuser / Optic: **not applicable**


Mounting type: **Wall, direct/indirect (WDI)**
Power supply: **220-240V, 50-60Hz**
Control: **Casambi**
Protection Class: **I**
IP: **IP20**
Material: **Steel housing**
Finishing: **powder coated: fog (RAL7038), forrest (RAL6005)**

TECHNICAL DRAWING

Dimensions: **388 mm**



PHOTOMETRIC DATA

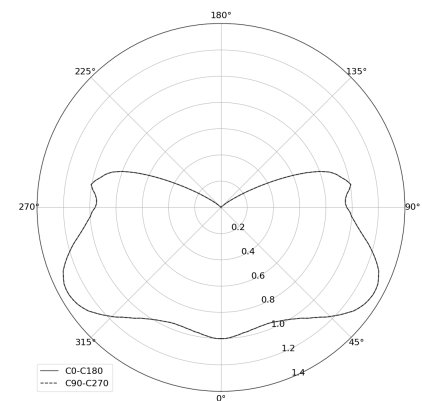

ACCESSORIES (ORDERED SEPARATELY)

OTHER