

STELLAR W

CODE: 5.2103.03M1.1670.HB

LED

3000 K

>90

SDCM ≤3

50.000 h  
L80 B10

IP20

ON/OFF

220-240V  
50-60Hz








TECHNICAL DATA


|                            |                          |                   |                                               |
|----------------------------|--------------------------|-------------------|-----------------------------------------------|
| Power:                     | 29 W CC HO (High output) | Mounting type:    | Wall, direct/indirect (WDI)                   |
| Flux:                      | 927 lm                   | Power supply:     | 220-240V, 50-60Hz                             |
| CCT:                       | 3000 K                   | Control:          | ON/OFF                                        |
| CRI:                       | >90                      | Protection Class: | I                                             |
| SDCM:                      | ≤3                       | IP:               | IP20                                          |
| Durability of LED sources: | 50.000 h, L80 B10        | Material:         | Steel housing                                 |
| Diffuser / Optic:          | not applicable           | Finishing:        | powder coated: graphite (RAL7024), black dust |

TECHNICAL DRAWING

Dimensions:: 520 mm



PHOTOMETRIC DATA

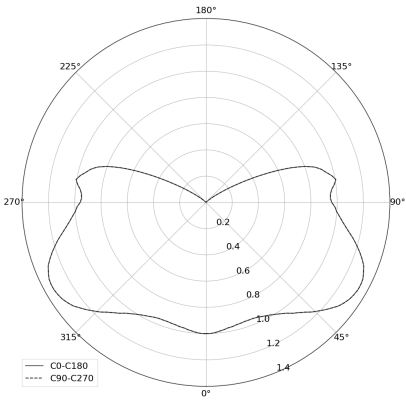

ACCESSORIES (ORDERED SEPARATELY)

OTHER