


STELLAR W

CODE: 5.2103.03M1.1770.HS

LED | 4000 K | >90 | SDCM ≤3 | 50.000 h L80 B10 | IP20 | ON/OFF | 220-240V 50-60Hz |  |  |




TECHNICAL DATA

Power: 29 W CC HO (High output)
Flux: 975 lm
CCT: 4000 K
CRI: >90
SDCM: ≤3
Durability of LED sources: 50.000 h, L80 B10
Diffuser / Optic: not applicable


Mounting type: Wall, direct/indirect (WDI)
Power supply: 220-240V, 50-60Hz
Control: ON/OFF
Protection Class: I
IP: IP20
Material: Steel housing
Finishing: powder coated: graphite (RAL7024), saphire (RAL5003)

TECHNICAL DRAWING

Dimensions: 520 mm



PHOTOMETRIC DATA

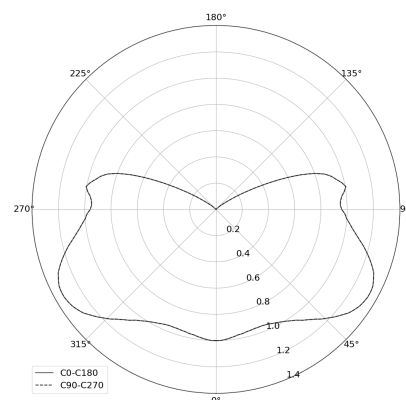

ACCESSORIES (ORDERED SEPARATELY)

OTHER