




STELLAR W

CODE: 5.2103.03M1.2770.HC

LED | 4000 K | >90 | SDCM ≤3 | 50.000 h
L80 B10 | IP20 | DALI | 220-240V
50-60Hz |  |  |



TECHNICAL DATA

Power: **29 W CC HO (High output)**
Flux: **975 lm**
CCT: **4000 K**
CRI: **>90**
SDCM: **≤3**
Durability of LED sources: **50.000 h, L80 B10**
Diffuser / Optic: **not applicable**

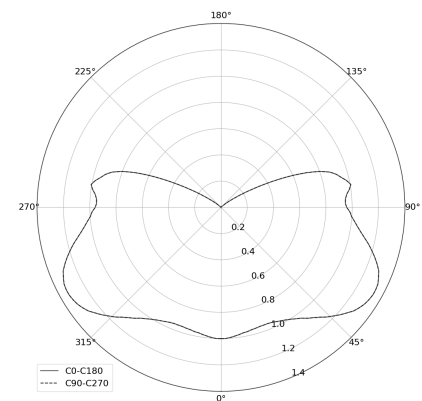
Mounting type: **Wall, direct/indirect (WDI)**
Power supply: **220-240V, 50-60Hz**
Control: **DALI**
Protection Class: **I**
IP: **IP20**
Material: **Steel housing**
Finishing: **powder coated: graphite (RAL7024), cloudy**

TECHNICAL DRAWING

Dimensions: **520 mm**



PHOTOMETRIC DATA



ACCESSORIES (ORDERED SEPARATELY)

OTHER