

KAMERTON S Louver

CODE: 5.3201.02D1.C77W.50

LED | 4000 K | >90 | SDCM ≤3 | 50.000 h L80 B10 | IP20 | Casambi | 220-240V 50-60Hz |  |  |




TECHNICAL DATA


|                            |                            |                   |                                |
|----------------------------|----------------------------|-------------------|--------------------------------|
| Power:                     | 18,8 W CC HO (High output) | Mounting type:    | Suspended, direct (SD)         |
| Flux:                      | 2550 lm                    | Power supply:     | 220-240V, 50-60Hz              |
| CCT:                       | 4000 K                     | Control:          | Casambi                        |
| CRI:                       | >90                        | Protection Class: | I                              |
| SDCM:                      | ≤3                         | IP:               | IP20                           |
| Durability of LED sources: | 50.000 h, L80 B10          | Material:         | Extruded aluminium profile     |
| Diffuser / Optic:          | Wide beam (UGR<19)         | Finishing:        | powder coated: black (RAL9005) |

TECHNICAL DRAWING

Dimensions:: 1077x44 mm

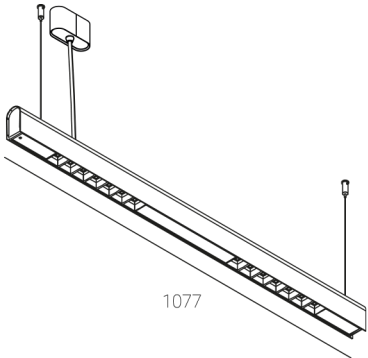

PHOTOMETRIC DATA

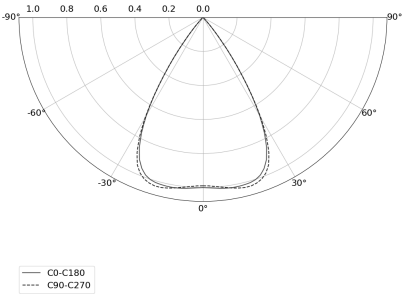

ACCESSORIES (ORDERED SEPARATELY)

OTHER