


KAMERTON S Louver

CODE: 5.3201.03D1.167W.F0

LED | 3000 K | >90 | SDCM ≤3 | 50.000 h L80 B10 | IP20 | ON/OFF | 220-240V 50-60Hz |  |  |

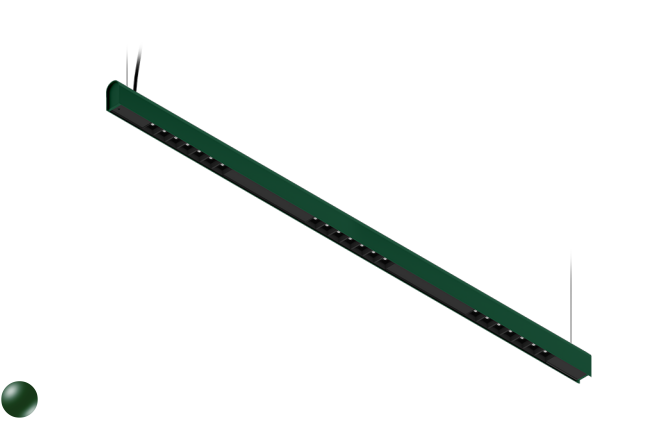


TECHNICAL DATA


|                            |                            |                   |                                  |
|----------------------------|----------------------------|-------------------|----------------------------------|
| Power:                     | 28,2 W CC HO (High output) | Mounting type:    | Suspended, direct (SD)           |
| Flux:                      | 3576 lm                    | Power supply:     | 220-240V, 50-60Hz                |
| CCT:                       | 3000 K                     | Control:          | ON/OFF                           |
| CRI:                       | >90                        | Protection Class: | I                                |
| SDCM:                      | ≤3                         | IP:               | IP20                             |
| Durability of LED sources: | 50.000 h, L80 B10          | Material:         | Extruded aluminium profile       |
| Diffuser / Optic:          | Wide beam (UGR<19)         | Finishing:        | powder coated: forrest (RAL6005) |

TECHNICAL DRAWING

Dimensions:: 1637x44 mm

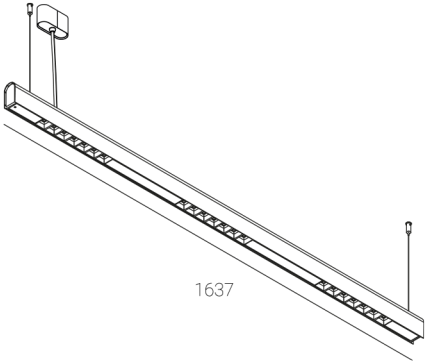

PHOTOMETRIC DATA

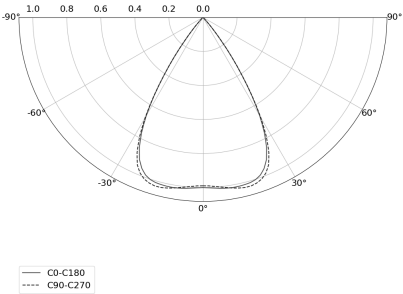

ACCESSORIES (ORDERED SEPARATELY)

OTHER