

KAMERTON S Louver

CODE: 5.3201.0211.C77W.H0

LED | 4000 K | >90 | SDCM ≤3 | 50.000 h L80 B10 | IP20 | Casambi | 220-240V 50-60Hz |  |  |




TECHNICAL DATA


|                            |                                 |                   |                                   |
|----------------------------|---------------------------------|-------------------|-----------------------------------|
| Power:                     | 18,8+10,1 W CC HO (High output) | Mounting type:    | Suspended, direct/indirect (SDI)  |
| Flux:                      | 3744 lm                         | Power supply:     | 220-240V, 50-60Hz                 |
| CCT:                       | 4000 K                          | Control:          | Casambi                           |
| CRI:                       | >90                             | Protection Class: | I                                 |
| SDCM:                      | ≤3                              | IP:               | IP20                              |
| Durability of LED sources: | 50.000 h, L80 B10               | Material:         | Extruded aluminium profile        |
| Diffuser / Optic:          | Wide beam (UGR<19)              | Finishing:        | powder coated: graphite (RAL7024) |

TECHNICAL DRAWING

Dimensions:: 1077x44 mm

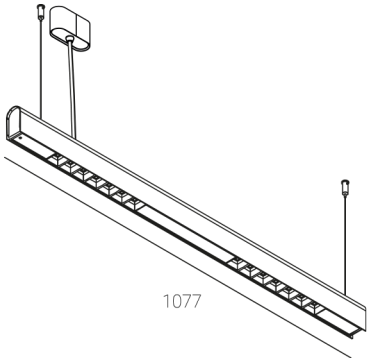

PHOTOMETRIC DATA

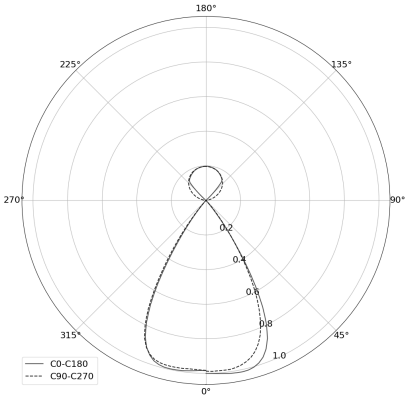

ACCESSORIES (ORDERED SEPARATELY)

OTHER