

KAMERTON S Louver

CODE: 5.3201.03I1.WA3W.H0

LED

2700-3000K

>90

SDCM ≤3

50.000 h
L80 B10

IP20

Dim to warm

220-240V
50-60Hz



CE




TECHNICAL DATA


Power:	28,2+16,8 W CV HO (High output)	Mounting type:	Suspended, direct/indirect (SDI)
Flux:	4286 lm	Power supply:	220-240V, 50-60Hz
CCT:	2700-3000K	Control:	Dim to warm
CRI:	>90	Protection Class:	I
SDCM:	≤3	IP:	IP20
Durability of LED sources:	50.000 h, L80 B10	Material:	Extruded aluminium profile
Diffuser / Optic:	Wide beam (UGR<19)	Finishing:	powder coated: graphite (RAL7024)

TECHNICAL DRAWING

Dimensions:: 1637x44 mm

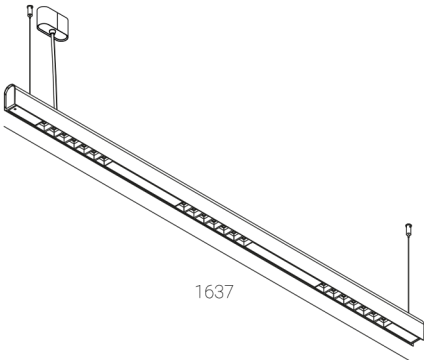

PHOTOMETRIC DATA

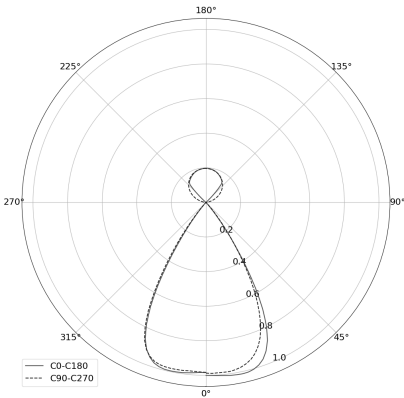

ACCESSORIES (ORDERED SEPARATELY)

OTHER