


KAMERTON S Louver

CODE: 5.3201.0311.WA3W.F0

LED | 2700-3000K | >90 | SDCM ≤3 | 50.000 h L80 B10 | IP20 | Dim to warm | 220-240V 50-60Hz |  |  |

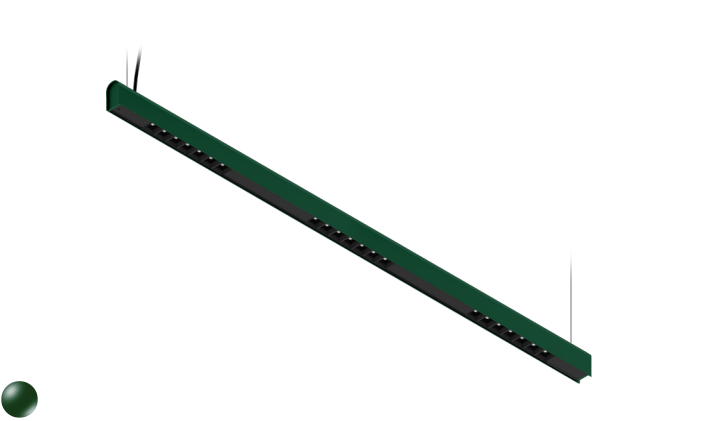


TECHNICAL DATA


Power:	28,2+16,8 W CV HO (High output)	Mounting type:	Suspended, direct/indirect (SDI)
Flux:	4286 lm	Power supply:	220-240V, 50-60Hz
CCT:	2700-3000K	Control:	Dim to warm
CRI:	>90	Protection Class:	I
SDCM:	≤3	IP:	IP20
Durability of LED sources:	50.000 h, L80 B10	Material:	Extruded aluminium profile
Diffuser / Optic:	Wide beam (UGR<19)	Finishing:	powder coated: forrest (RAL6005)

TECHNICAL DRAWING

Dimensions:: 1637x44 mm

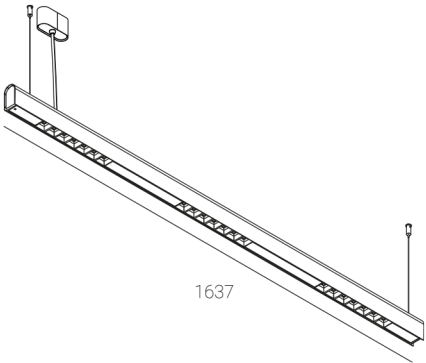

PHOTOMETRIC DATA

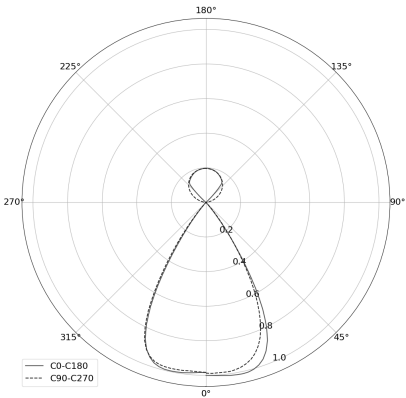

ACCESSORIES (ORDERED SEPARATELY)

OTHER