

KAMERTON S Louver

CODE: 5.3201.0311.WA3W.E0

LED

2700-3000K

>90

SDCM ≤3

50.000 h  
L80 B10

IP20

Dim to warm

220-240V  
50-60Hz

CE




TECHNICAL DATA


|                            |                                 |                   |                                  |
|----------------------------|---------------------------------|-------------------|----------------------------------|
| Power:                     | 28,2+16,8 W CV HO (High output) | Mounting type:    | Suspended, direct/indirect (SDI) |
| Flux:                      | 4286 lm                         | Power supply:     | 220-240V, 50-60Hz                |
| CCT:                       | 2700-3000K                      | Control:          | Dim to warm                      |
| CRI:                       | >90                             | Protection Class: | I                                |
| SDCM:                      | ≤3                              | IP:               | IP20                             |
| Durability of LED sources: | 50.000 h, L80 B10               | Material:         | Extruded aluminium profile       |
| Diffuser / Optic:          | Wide beam (UGR<19)              | Finishing:        | powder coated: earth             |

TECHNICAL DRAWING

Dimensions:: 1637x44 mm

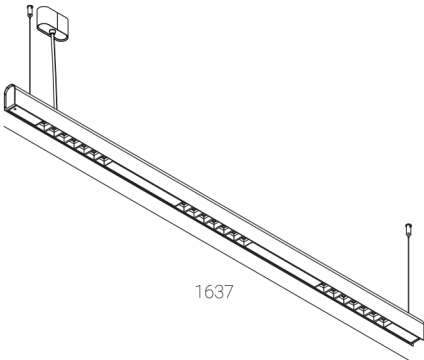

PHOTOMETRIC DATA

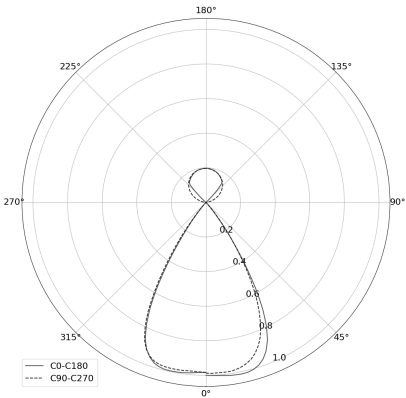

ACCESSORIES (ORDERED SEPARATELY)

OTHER