


KAMERTON S Louver

CODE: 5.3201.04I1.177W.CO

LED | 4000 K | >90 | SDCM ≤3 | 50.000 h L80 B10 | IP20 | ON/OFF | 220-240V 50-60Hz |  |  |

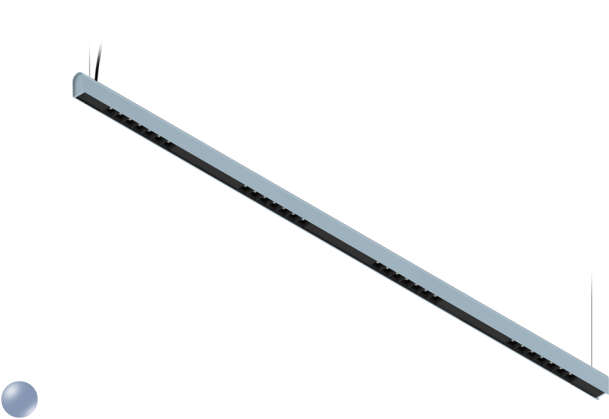


TECHNICAL DATA


Power:	37,6+23,5 W CC HO (High output)	Mounting type:	Suspended, direct/indirect (SDI)
Flux:	7886 lm	Power supply:	220-240V, 50-60Hz
CCT:	4000 K	Control:	ON/OFF
CRI:	>90	Protection Class:	I
SDCM:	≤3	IP:	IP20
Durability of LED sources:	50.000 h, L80 B10	Material:	Extruded aluminium profile
Diffuser / Optic:	Wide beam (UGR<19)	Finishing:	powder coated: cloudy

TECHNICAL DRAWING

Dimensions:: 2197x44 mm

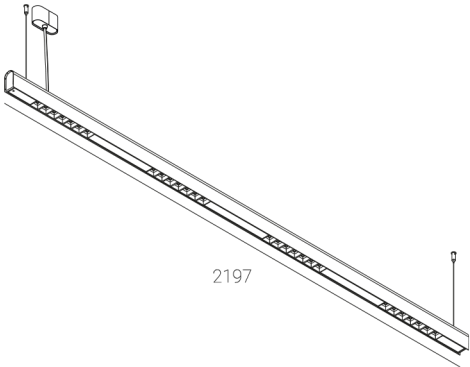

PHOTOMETRIC DATA

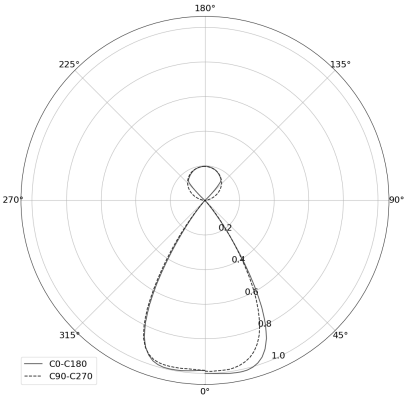

ACCESSORIES (ORDERED SEPARATELY)

OTHER