


KAMERTON S Louver

CODE: 5.3201.04I1.C67W.CO

LED | 3000 K | >90 | SDCM ≤3 | 50.000 h L80 B10 | IP20 | Casambi | 220-240V 50-60Hz |  |  |

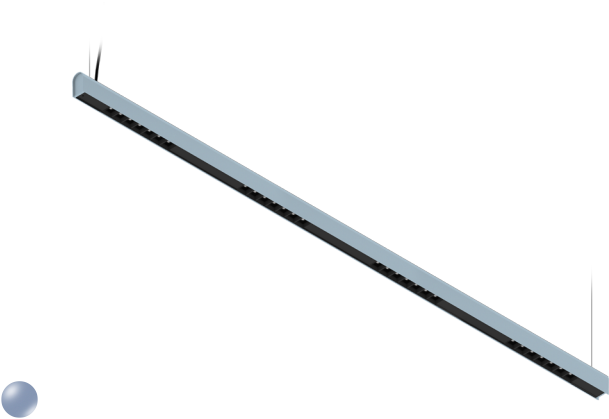


TECHNICAL DATA


|                            |                                 |                   |                                  |
|----------------------------|---------------------------------|-------------------|----------------------------------|
| Power:                     | 37,6+23,5 W CC HO (High output) | Mounting type:    | Suspended, direct/indirect (SDI) |
| Flux:                      | 7372 lm                         | Power supply:     | 220-240V, 50-60Hz                |
| CCT:                       | 3000 K                          | Control:          | Casambi                          |
| CRI:                       | >90                             | Protection Class: | I                                |
| SDCM:                      | ≤3                              | IP:               | IP20                             |
| Durability of LED sources: | 50.000 h, L80 B10               | Material:         | Extruded aluminium profile       |
| Diffuser / Optic:          | Wide beam (UGR<19)              | Finishing:        | powder coated: cloudy            |

TECHNICAL DRAWING

Dimensions:: 2197x44 mm

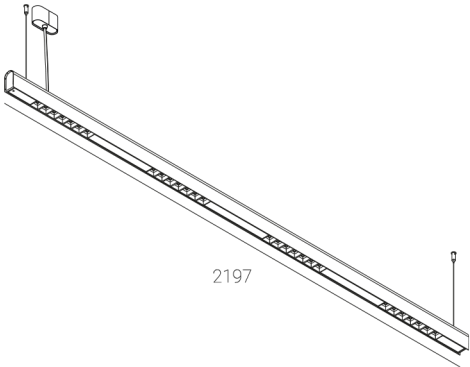

PHOTOMETRIC DATA

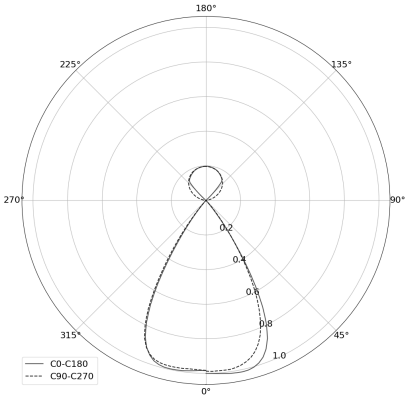

ACCESSORIES (ORDERED SEPARATELY)

OTHER