

KAMERTON S Line

CODE: 5.3202.03D1.267L.40

LED

3000 K

>90

SDCM ≤3

50.000 h  
L80 B10

IP20

DALI

220-240V  
50-60Hz



CE




TECHNICAL DATA


|                            |                            |                   |                                |
|----------------------------|----------------------------|-------------------|--------------------------------|
| Power:                     | 33,6 W CC HO (High output) | Mounting type:    | Suspended, direct (SD)         |
| Flux:                      | 4185 lm                    | Power supply:     | 220-240V, 50-60Hz              |
| CCT:                       | 3000 K                     | Control:          | DALI                           |
| CRI:                       | >90                        | Protection Class: | I                              |
| SDCM:                      | ≤3                         | IP:               | IP20                           |
| Durability of LED sources: | 50.000 h, L80 B10          | Material:         | Extruded aluminium profile     |
| Diffuser / Optic:          | Linear optic (satine)      | Finishing:        | powder coated: white (RAL9016) |

TECHNICAL DRAWING

Dimensions:: 1637x44 mm

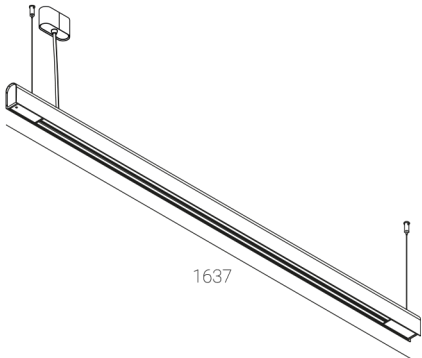

PHOTOMETRIC DATA

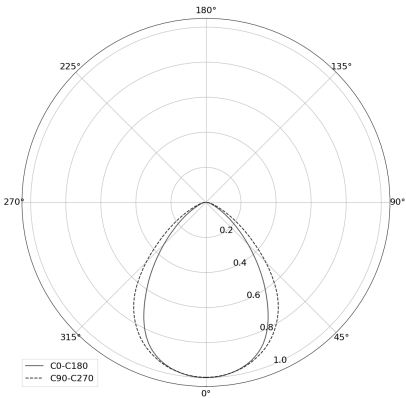

ACCESSORIES (ORDERED SEPARATELY)

OTHER