

KAMERTON S Line

CODE: 5.3202.0311.2678.G0

LED

3000 K

>90

SDCM ≤3

50.000 h  
L80 B10


IP20

DALI

220-240V  
50-60Hz



CE

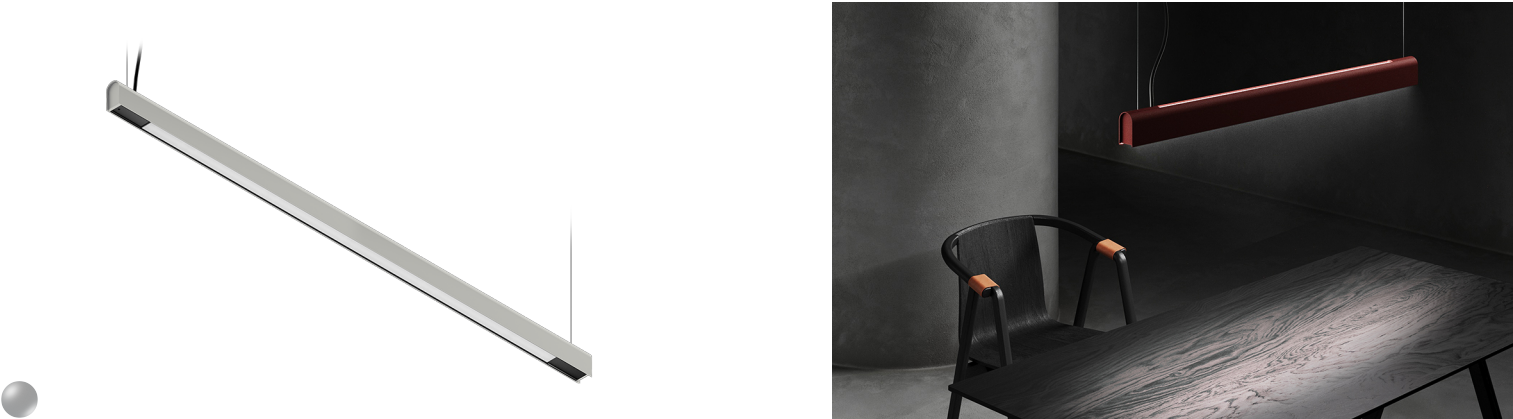


TECHNICAL DATA


|                            |                                 |                   |                                  |
|----------------------------|---------------------------------|-------------------|----------------------------------|
| Power:                     | 33,6+16,8 W CC HO (High output) | Mounting type:    | Suspended, direct/indirect (SDI) |
| Flux:                      | 4162 lm                         | Power supply:     | 220-240V, 50-60Hz                |
| CCT:                       | 3000 K                          | Control:          | DALI                             |
| CRI:                       | >90                             | Protection Class: | I                                |
| SDCM:                      | ≤3                              | IP:               | IP20                             |
| Durability of LED sources: | 50.000 h, L80 B10               | Material:         | Extruded aluminium profile       |
| Diffuser / Optic:          | Dark Microcrystal               | Finishing:        | powder coated: fog (RAL7038)     |

TECHNICAL DRAWING

Dimensions:: 1637x44 mm

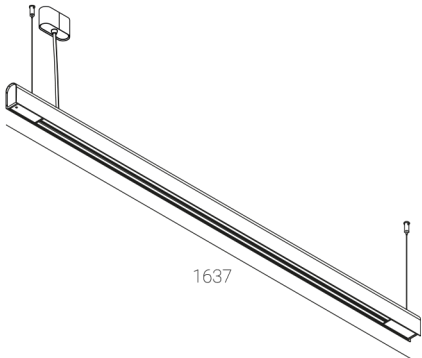

PHOTOMETRIC DATA

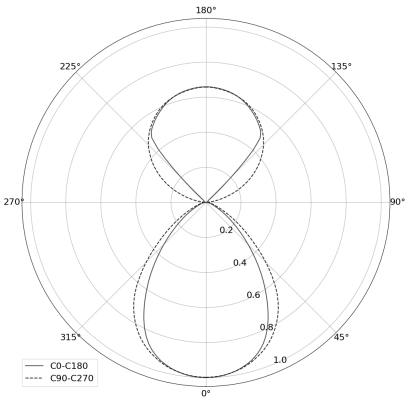

ACCESSORIES (ORDERED SEPARATELY)

OTHER