

KAMERTON S Line

CODE: 5.3202.04I1.WA38.G0

LED

2700-3000K

>90

SDCM ≤3

50.000 h  
L80 B10


IP20

Dim to warm

220-240V  
50-60Hz



CE

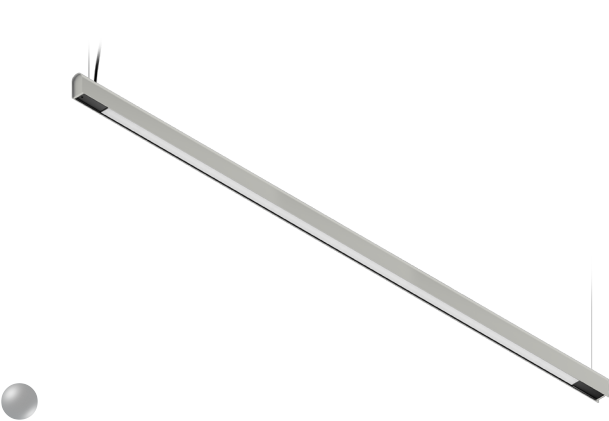


TECHNICAL DATA


|                            |                               |                   |                                  |
|----------------------------|-------------------------------|-------------------|----------------------------------|
| Power:                     | 47+23,5 W CV HO (High output) | Mounting type:    | Suspended, direct/indirect (SDI) |
| Flux:                      | 5419 lm                       | Power supply:     | 220-240V, 50-60Hz                |
| CCT:                       | 2700-3000K                    | Control:          | Dim to warm                      |
| CRI:                       | >90                           | Protection Class: | I                                |
| SDCM:                      | ≤3                            | IP:               | IP20                             |
| Durability of LED sources: | 50.000 h, L80 B10             | Material:         | Extruded aluminium profile       |
| Diffuser / Optic:          | Dark Microcrystal             | Finishing:        | powder coated: fog (RAL7038)     |

TECHNICAL DRAWING

Dimensions:: 2197x44 mm

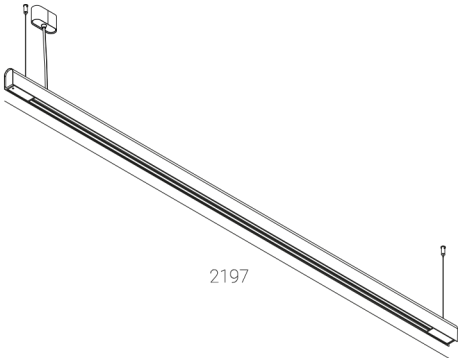

PHOTOMETRIC DATA

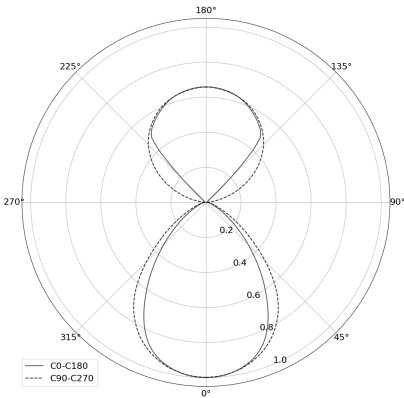

ACCESSORIES (ORDERED SEPARATELY)

OTHER