

KAMERTON Stand Louver

CODE: 5.3231.02P1.C67W.S0

LED | 3000 K | >90 | SDCM ≤3 | 50,000 h L80 B10 | IP20 | Casambi | 220-240V 50-60Hz |  | 




TECHNICAL DATA


Power:	18,8+10,1 W CC HO (High output)	Mounting type:	Standing fixture
Flux:	3500 lm	Power supply:	220-240V, 50-60Hz
CCT:	3000 K	Control:	Casambi
CRI:	>90	Protection Class:	I
SDCM:	≤3	IP:	IP20
Durability of LED sources:	50.000 h, L80 B10	Material:	Extruded aluminium profile
Diffuser / Optic:	Wide beam (UGR<19)	Finishing:	powder coated: saphire (RAL5003)

TECHNICAL DRAWING

Dimensions: 1235x350 mm

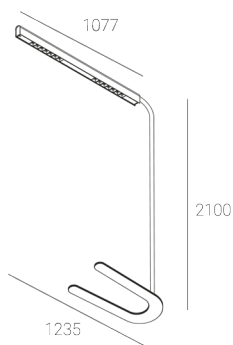

PHOTOMETRIC DATA

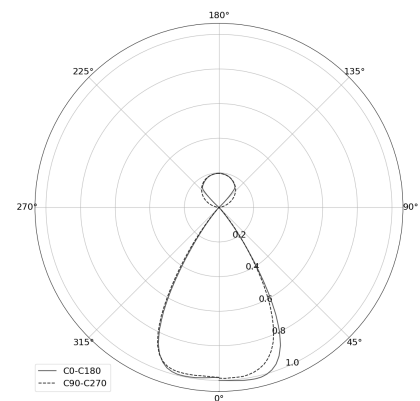

ACCESSORIES (ORDERED SEPARATELY)

OTHER